

LED Tubes & Fixtures

V-TAC's extensive range of efficient tubes & fixtures boasts premium quality LEDs provided by Samsung, a staggering lifespan of up to 30,000 hr, and an unbreakable body built with the most durable materials, and a wide range of lengths and sizes for different applications.

More innovative additions in this range include
1) TP(a) rated fixtures compatible with emergency packs & microwave sensors
2) Batten Fittings with CCT-changing Switch
3) Linkable T5 Batten Fittings, and more.
4) Waterproof Fittings

Key Features

- LEDs provided by Samsung
- Built with strong, durable materials
- TP(a) Rated fittings for select models
- Programmable DIP Switch Driver for select models
- Emergency Pack & Sensor Compatibility
- Linkable/Continuous T5 fittings
- CCT Changing Switch for select models

EVOLUTION TUBES SERIES






- Nano Plastic
- 25,000 hr lifespan
- CRI - >80
- Flicker Free
- PF - 0.5
- On/Off Cycle >15000
- Input Voltage - AC:220-240V,50Hz
- Beam angle:160 °

05 YEAR WARRANTY

EFFICIENCY 160 LUMENS/W

Together with its impressive energy rating, our LED tubes offer a staggering 160 lumen per watt output and five years warranty —— making it one of the most superior in the competitive led market.

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
216475 | 4000K DAY WHITE 216476 | 6500K WHITE	VT-1607-N	7W	1000	25 pcs		28x600mm
216478 | 4000K DAY WHITE 216479 | 6500K WHITE	VT-1612-N	12W	1750	25 pcs		28x1200mm
216481 | 4000K DAY WHITE 216482 | 6500K WHITE	VT-1615-N	15W	2150	25 pcs		28x1500mm

G13-T8 - HIGH LUMEN NANO PLASTIC TUBES






- Nano Plastic Body
- 30,000 hr lifespan
- 160° Beam Angle
- On/Off Cycle >15000
- AC:220-240V,50Hz
- CRI - >80
- >0.5 PF
- <0.5 s Instant start

05 YEAR WARRANTY

110-120 LUMEN/W

This modern range of high lumen LED tubes with Samsung LEDs are the perfect retrofit for fluorescent fixtures.This range offers strong and ample light with promising 120 lm/w options and impressive energy-saving features compared to its traditional counterparts.

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21798 | 3000K WARM WHITE 21686 | 4000K DAY WHITE 21687 | 6500K WHITE	VT-062-N	7.5W	850	25 pcs		600x28mm
21688 | 3000K WARM WHITE 21672 | 4000K DAY WHITE 21673 | 6500K WHITE	VT-122-N	16.5W	1850	25 pcs		1200x28mm
21799 | 3000K WARM WHITE 21674 | 4000K DAY WHITE 21675 | 6500K WHITE	VT-152-N	24W	3000	25 pcs		1500x28mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.




T8 PRO TUBES



- Nano Plastic Body
- 30,000 hr lifespan
- 160° Beam Angle
- On/Off Cycle >15000
- AC:220-240V,50Hz
- CRI - >80
- >0.5 PF
- <0.5 s Instant start

05 YEAR WARRANTY

This modern range of LED tubes with Samsung LEDs are the perfect retrofit for fluorescent fixtures. These sets of tubes are available in standard lengths for general purpose lighting in residences, commercial establishments, supermarkets, and offices.

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21650 | 3000K WARM WHITE 21651 | 4000K DAY WHITE 21652 | 6500K WHITE	VT-061-N	9W	850	25 pcs		600x28mm
21653 | 3000K WARM WHITE 21654 | 4000K DAY WHITE 21655 | 6500K WHITE	VT-121-N	18W	1850	25 pcs		1200x28mm
21656 | 3000K WARM WHITE 21657 | 4000K DAY WHITE 21658 | 6500K WHITE	VT-151-N	20W	2100	25 pcs		1500x28mm




SLIM FITTINGS-EVOLUTION SERIES-HIGH LUMEN



- IP20 Rating.
- SMD
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Plastic
- 120° Beam Angle
- CRI >80
- PF>0.7
- 25,000 hr lifespan
- On/Off Cycle >15000

05 YEAR WARRANTY

EFFICIENCY 160 LUMENS/W

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20359 | 3000K WARM WHITE 20360 | 4000K DAY WHITE 20361 | 6500K WHITE	VT-8315-N	15W	2250	30 pcs		600x75x24mm
20362 | 3000K WARM WHITE 20363 | 4000K DAY WHITE 20364 | 6500K WHITE	VT-8330-N	30W	4650	30 pcs		1200x75x24mm
20365 | 3000K WARM WHITE 20366 | 4000K DAY WHITE 20367 | 6500K WHITE	VT-8338-N	38W	5900	30 pcs		1500x75x24mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.



05 YEAR WARRANTY






120 LUMEN/W

Quick CONNECTOR

The tried-and-true 10W to 60W range of efficient and powerful LED prismatic fittings from V-TAC. Some have a high lumen rating of 120 lm/w and are equipped with quick connectors to shorten set-up time during installation. Available in 3000K, 4000K, and 6400K color temperatures, these durable fittings are ideal for any indoor lighting use.

SLIM FITTINGS

- IP20 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Plastic
- 120° Beam Angle
- CRI >80
- PF>0.5 to 0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20344 | 3000K WARM WHITE 20345 | 4000K DAY WHITE 20346 | 6500K WHITE	VT-8-10-N	10W	1000	30 pcs		300x75x24mm
20347 | 3000K WARM WHITE 20348 | 4000K DAY WHITE 20349 | 6500K WHITE	VT-8-20-N	20W	2050	30 pcs		600x75x24mm
20350 | 3000K WARM WHITE 20351 | 4000K DAY WHITE 20352 | 6500K WHITE	VT-8-40-N	40W	4300	30 pcs		1200x75x24mm
20353 | 3000K WARM WHITE 20354 | 4000K DAY WHITE 20355 | 6500K WHITE	VT-8-50-N	50W	6000	30 pcs		1500x75x24mm
20356 | 3000K WARM WHITE 21670 | 4000K DAY WHITE 21671 | 6500K WHITE	VT-8-60-N	60W	7200	30 pcs		1800x24x75mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.



05 YEAR WARRANTY

IK08 RATING

135 LUMEN/W

3 VARIABLE CCT / VARIABLE WATTS

LED BATTEN FITTINGS

- 3 power levels selectable using DIP switch
- CCT change (3000K/4000K/6500K) via DIP switch

Standard Fittings

- SMD Samsung LED Chip
- 50,000-hour lifespan
- 120° Beam Angle
- AC:220-240V, 50Hz
- 135LM/W
- IK08
- PC+Iron
- PF>0.9
- CRI>80

MICROWAVE SENSOR

Microwave Sensor

- Microwave Sensor
- Detection Area: 50%/100%
- Stand-by Dimming level: 0%/20%
- Stand-by Period: 15 mins/+∞
- Hold Time: 5s/1 min/3 min/10 min
- Daylight Threshold: 30 Lux/Disable
- Detection Range: 12M (Max)
- Detection Angle: Side Wall <150°/Ceiling Mount 360°

EMERGENCY BATTERY BACKUP

Emergency Backup


- Battery Type: 6.4V, LiFePO4, 18730 2000mAh
- Battery Charge Voltage: DC:9V
- Battery Current: 30~400 mA
- Battery Discharge Voltage: DC 6.0~8.2V
- Battery Discharge Current: 350~700 mA
- Charging Time: > 12Hours
- Working Time: > 3Hours
- Test Function: Manual

Optional(Not included)
SKU:7814
REMOTE CONTROLLER
Compatible with
VT-4004S / VT-4004SE
VT-4005S / VT-4005SE
VT-4006S / VT-4006SE



*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.


LED BATTEN FITTINGS - 4 FEET





SKU	Model	Watts	Lumens	Box Qty
7011 | 3IN1	VT-4004	20W 30W 40W	3000K - 2500 lm | 4000K - 2800 lm | 6500K - 2700 lm 3000K - 3600 lm | 4000K - 4200 lm | 6500K - 3750 lm 3000K - 4600 lm | 4000K - 5400 lm | 6500K - 4800 lm	6 pcs
7012 | 3IN1	VT-4004S (Sensor)	20W 30W 40W	3000K - 2500 lm | 4000K - 2800 lm | 6500K - 2700 lm 3000K - 3600 lm | 4000K - 4200 lm | 6500K - 3750 lm 3000K - 4600 lm | 4000K - 5400 lm | 6500K - 4800 lm	6 pcs
7013 | 3IN1	VT-4004E (Emergency Battery)	20W 30W 40W	3000K - 2500 lm | 4000K - 2800 lm | 6500K - 2700 lm 3000K - 3600 lm | 4000K - 4200 lm | 6500K - 3750 lm 3000K - 4600 lm | 4000K - 5400 lm | 6500K - 4800 lm	6 pcs
7014 | 3IN1	VT-4004SE (Sensor+Emergency Battery)	20W 30W 40W	3000K - 2500 lm | 4000K - 2800 lm | 6500K - 2700 lm 3000K - 3600 lm | 4000K - 4200 lm | 6500K - 3750 lm 3000K - 4600 lm | 4000K - 5400 lm | 6500K - 4800 lm	6 pcs


LED BATTEN FITTINGS - 5 FEET





SKU	Model	Watts	Lumens	Box Qty
7015 | 3IN1	VT-4005	30W 40W 50W	3000K - 3750 lm | 4000K - 4200 lm | 6500K - 4050 lm 3000K - 4800 lm | 4000K - 5600 lm | 6500K - 5000 lm 3000K - 5750 lm | 4000K - 6750 lm | 6500K - 6000 lm	6 pcs
7016 | 3IN1	VT-4005S (Sensor)	30W 40W 50W	3000K - 3750 lm | 4000K - 4200 lm | 6500K - 4050 lm 3000K - 4800 lm | 4000K - 5600 lm | 6500K - 5000 lm 3000K - 5750 lm | 4000K - 6750 lm | 6500K - 6000 lm	6 pcs
7017 | 3IN1	VT-4005E (Emergency Battery)	30W 40W 50W	3000K - 3750 lm | 4000K - 4200 lm | 6500K - 4050 lm 3000K - 4800 lm | 4000K - 5600 lm | 6500K - 5000 lm 3000K - 5750 lm | 4000K - 6750 lm | 6500K - 6000 lm	6 pcs
7018 | 3IN1	VT-4005SE (Sensor+Emergency Battery)	30W 40W 50W	3000K - 3750 lm | 4000K - 4200 lm | 6500K - 4050 lm 3000K - 4800 lm | 4000K - 5600 lm | 6500K - 5000 lm 3000K - 5750 lm | 4000K - 6750 lm | 6500K - 6000 lm	6 pcs

LED BATTEN FITTINGS - 6 FEET





SKU	Model	Watts	Lumens	Box Qty
7019 | 3IN1	VT-4006	40W 50W 60W	3000K - 5000 lm | 4000K - 5800 lm | 6500K - 5400 lm 3000K - 6000 lm | 4000K - 7000 lm | 6500K - 6250 lm 3000K - 6900 lm | 4000K - 8100 lm | 6500K - 7200 lm	6 pcs
7020 | 3IN1	VT-4006S (Sensor)	40W 50W 60W	3000K - 5000 lm | 4000K - 5800 lm | 6500K - 5400 lm 3000K - 6000 lm | 4000K - 7000 lm | 6500K - 6250 lm 3000K - 6900 lm | 4000K - 8100 lm | 6500K - 7200 lm	6 pcs
7021 | 3IN1	VT-4006E (Emergency Battery)	40W 50W 60W	3000K - 5000 lm | 4000K - 5800 lm | 6500K - 5400 lm 3000K - 6000 lm | 4000K - 7000 lm | 6500K - 6250 lm 3000K - 6900 lm | 4000K - 8100 lm | 6500K - 7200 lm	6 pcs
7022 | 3IN1	VT-4006SE (Sensor+Emergency Battery)	40W 50W 60W	3000K - 5000 lm | 4000K - 5800 lm | 6500K - 5400 lm 3000K - 6000 lm | 4000K - 7000 lm | 6500K - 6250 lm 3000K - 6900 lm | 4000K - 8100 lm | 6500K - 7200 lm	6 pcs

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.



05 YEAR WARRANTY

LINKABLE
UP TO 100 WATTS

The new T5 Batten Fittings retain the premium qualities of V-TAC's LED fixtures. Multiple batten fittings can be linked, making them an efficient alternative lighting fixture for indoor spaces of any size.

INTEGRATED T5

- IP20 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Plastic
- 160° Beam Angle
- CRI >80
- PF>0.5
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Box Qty	Size
21689 | 3000K WARM WHITE 21690 | 4000K DAY WHITE 21691 | 6500K WHITE	VT-035-N	4W	360	25 pcs	307 x36x90mm
21692 | 3000K WARM WHITE 21693 | 4000K DAY WHITE 21694 | 6500K WHITE	VT-065-N	7W	700	25 pcs	551x27x30mm
21695 | 3000K WARM WHITE 21696 | 4000K DAY WHITE 21697 | 6500K WHITE	VT-125-N	16W	1600	25 pcs	1151x27x30mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.

NEW WATERPROOF FITTINGS-QUICK CONNECT-GT SERIES





- IP65 Rating.
- SMD-Samsung Chip
- 3 Years Warranty
- AC:200-240V,50/60Hz
- Body Type: PC
- 120° Beam Angle
- CRI >80
- PF>0.7 to 0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

03 YEAR WARRANTY

120 LUMEN/W

IP65 RATING

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
23391 | 4000K DAY WHITE 23392 | 6500K WHITE	VT-12017	18W	2160	12 pcs		600x68x59mm
23387 | 4000K DAY WHITE 23388 | 6500K WHITE	VT-12035	36W	4320	12 pcs		1200x68x59mm
23389 | 4000K DAY WHITE 23390 | 6500K WHITE	VT-12049	48W	5760	12 pcs		1500x68x59mm

NEW WATERPROOF FITTINGS-G SERIES






- IP65 Rating
- SMD-Samsung Chip
- 3 Years Warranty
- AC:200-240V,50/60Hz
- Body Type: PC
- 120° Beam Angle
- CRI >80
- PF>0.7 to 0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

03 YEAR WARRANTY

120 LUMEN/W

IP65 RATING

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
2162831 | 4000K DAY WHITE 2162821 | 6500K WHITE	VT-6076S	18W	2160	12 pcs		600x66x58mm
2162851 | 4000K DAY WHITE 2162841 | 6500K WHITE	VT-1249S	36W	4320	12 pcs		1200x66x58mm
2162871 | 4000K DAY WHITE 2162861 | 6500K WHITE	VT-1574S	48W	5760	12 pcs		1500x66x58mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.

WATERPROOF FITTINGS





- SMD LED Type
- 30,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- CRI: >70
- PF: >0.9

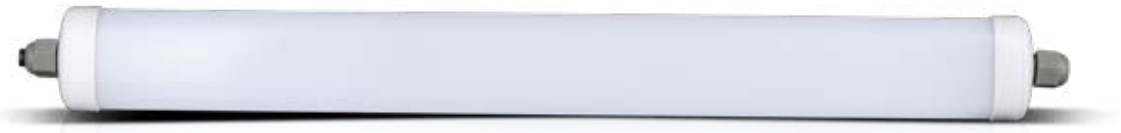
05 YEAR WARRANTY

IP65 RATING

EFFICIENCY 160 LUMENS/W

With its IP65 rating and tough exterior, the Waterproof Fittings are the optimal choice for a strong and durable fitting for indoor and outdoor lighting. Available in 4ft, 5ft, and 6ft, these Waterproof Fittings are ideal for illuminating open spaces that are frequently exposed to dust and
moisture.

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
216485 | 4000K DAY WHITE 216486 | 6500K WHITE	VT-1524-N	24W	3840	12 pcs		1200x65x58mm
216483 | 4000K DAY WHITE 216484 | 6500K WHITE	VT-1532-N	32W	5120	12 pcs		1500x65x58mm




05 YEAR WARRANTY

IP65 RATING

WATERPROOF FITTINGS-180CM

- SMD LED Type
- 30,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- CRI: >80
- PF: >0.9

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
680 | 4000K DAY WHITE 681 | 6400K WHITE	VT-180	60W	5400	9 pcs		1800x66x58mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.

MILKY COVER -M SERIES




- SMD LED Chip
- 25,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- On/Off Cycles >15000
- CRI >80
- PF >0.9
- IP65
- Body Type: ABS+PC

03 YEAR WARRANTY

IP65 RATING

120 LUMEN/W

This new addition to V-TAC's fixtures range promotes efficiency with its high lumen to watt ratio (120 lm/W) .The milky cover provides a softer, better-diffused light that is milder on the eyes.

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
2120211 | 4000K DAY WHITE 2120210 | 6500K WHITE	VT-60018-M-N	18W	2160	12 pcs		600x72x78mm
2120207 | 4000K DAY WHITE 2120206 | 6500K WHITE	VT-120036-M-N	36W	4320	12 pcs		1200x72x78mm
2120203 | 4000K DAY WHITE 2120202 | 6500K WHITE	VT-150048-M-N	48W	5760	12 pcs		1500x72x78mm

EMERGENCY BATTERY BACKUP



03 YEAR WARRANTY

IP65 RATING



120 LUMEN/W

POLYCARBONATE PC

EMERGENCY WATERPROOF FITTINGS

- 25,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- Battery Type:9.6V 2200mAh Ni-Cd battery
- Charging Time:24Hours
- Working Time:3Hours
- Emergency Power: 6-7W

- SMD LED Chip
- Body Type: PC
- On/Off Cycles >15000
- CRI >80
- PF >0.9
- IP65
- SS Clips

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
2120223 | 4000K DAY WHITE 2120222 | 6500K WHITE	VT-120136E-N	36W	4320	12 pcs		1200x72x78mm
2120221 | 4000K DAY WHITE 2120220 | 6500K WHITE	VT-150148E-N	48W	5760	12 pcs		1500x72x78mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.

MICROWAVE SENSOR



05 YEAR WARRANTY

IP65 RATING

120 LUMEN/W



STAINLESS STEEL CLIPS

POLYCARBONATE PC

- Waterproof Fitting designed with Lumen efficiency 120LM/W
- High power Samsung SMD-Chip technology makes the fitting reliable and durable
- Strong and sturdy PC body with Stainless Steel Clips
- Built in microwave sensor with 4 modes for optimal performance
- Protection from water, dust and corrosion - IP65 Rated
- Designed for maximum efficiency & minimal glare
- Suitable for parking lots, warehouses, garages, storage docks, workshops etc.

WATERPROOF FITTINGS WITH SENSOR

- SMD LED Chip
- 20,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- On/Off Cycles >15000
- 50%/100% Detection Distance
- 5s,1min,3min,10min Hold Time
- Body Type: PC
- CRI >80
- PF >0.9
- IP65
- SS Clips

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20468 | 4000K DAY WHITE 20469 | 6400K WHITE	VT-120136S	36W	4320	12 pcs		1200x78x72mm
20470 | 4000K DAY WHITE 20471 | 6400K WHITE	VT-150148S	48W	5760	12 pcs		1500x78x72mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.



03 YEAR WARRANTY

IP65 RATING



120 LUMEN/W

STAINLESS STEEL CLIPS

POLYCARBONATE PC

MILKY COVER - M SERIES SS CLIPS

- SMD LED Chip
- 25,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- On/Off Cycles >15000
- Body Type: PC
- CRI >80
- PF >0.9
- IP65
- SS Clips

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
2120217 | 4000K DAY WHITE 2120216 | 6500K WHITE	VT-120136-M-N	36W	4320	12 pcs		1200x72x78mm
2120215 | 4000K DAY WHITE 2120214 | 6500K WHITE	VT-150148-M-N	48W	5760	12 pcs		1500x72x78mm

EMERGENCY PACK



SKU
8343

- Input Voltage: AC:220-240V,50/60Hz
- Charging Time: 24 Hours
- Emergency Power: 6-7W
- Emergency Operation time: 3 Hours
- Battery Type: Ni-Cd 9.6V 2200mAh
- Size: 212x40x30mm
- Compatible with V-TAC's LED Waterproof Fitting - M Series SS Clips Milky Cover

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.