Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED DIMMABLE DRIVER
1-10V DIMMABLE



02 YEAR WARRANTY*

TECHNICAL DATA

SKU	6437
INPUT POWER	45W
INPUT VOLTAGE	AC 100-240V, 50/60Hz
OUTPUT	DC 25-40V, 1050mA
EFFICIENCY IN FULL LOAD	>87%@230V~
PF	≥0.9

WORKING TEMPERATURE	-20°C to +40°C
P_{no}	<0.5W
P_{sb}	<0.5W
PROTECTION RATING	IP20
DIMENSION	149x44x33 mm

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. This product is warranted for manufacturing defects only.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. Terminal block not included.
4. For Indoor use only


MULTI-LANGUAGE MANUAL QR CODE
Please scan the QR code to access the manual in multiple languages.

In case of any query/issue with the product, please reach out to us at: support@v-tac.eu
For More products range, inquiry please contact our distributor or nearest dealers.
V-TAC EUROPE LTD. Bulgaria, Plovdiv 4000, bul.L.Karavelow 9B

This marking indicates that this product should not be disposed of with other household wastes.


Caution, risk of electric shock.

CONNECTION DIAGRAM

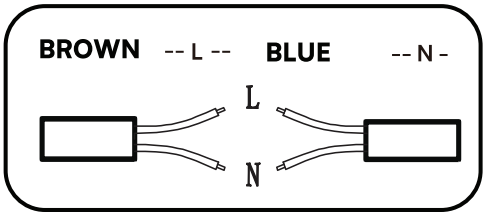

INSTALLATION INSTRUCTIONS

1. Please make sure to turn off the power before starting the installation.
2. Connect the AC input source to the power supply and the AC plug (not in the scope of delivery included)
3. Wire the DC output of the power supply unit to the LED Panel.
   Note: Please Wire the DC output of the power supply unit to the DC plug (not included in the scope of delivery included) and connect it to the DC connector of the LED Panel.
4. Turn on the power and test.

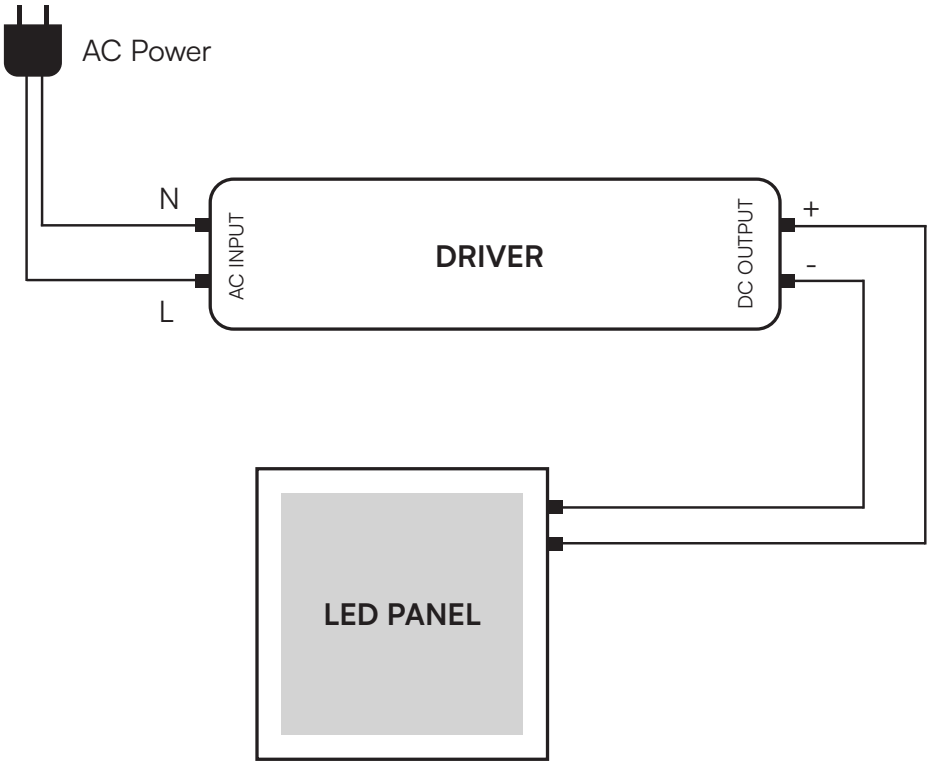

RoHS CE UKCA Dimmable 20 PAP