bamar técnicas, s.l.

Single scissor lift tables for partially concentrated loads

Model 1A


Heavy duty Lift tables improve factory and warehouse efficiency







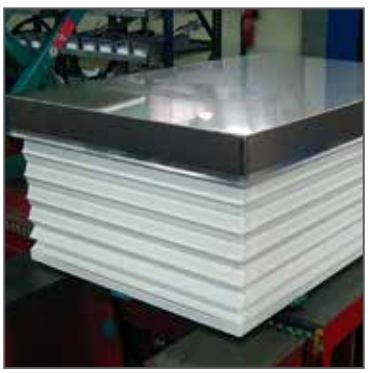



BOLZONI

Single scissor lift tables for partially concentrated loads

Model 1A

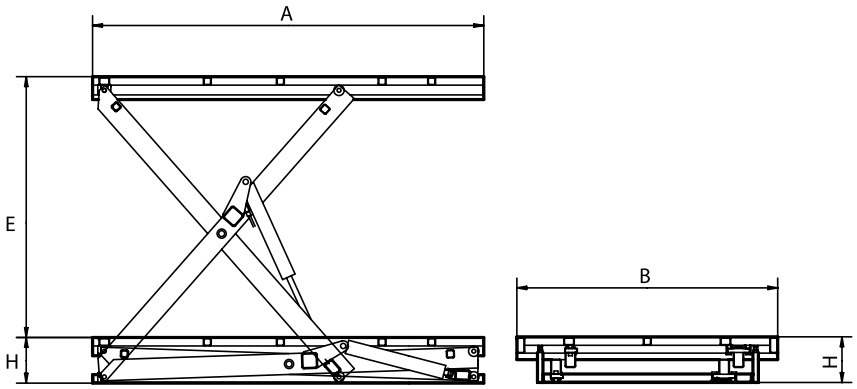


Range: 1000 Kg - 7000 Kg

- Aluminium safety bar stops the descent of the platform in case of contact with obstructions
- Single acting hydraulic cylinders equipped with hose safety valve, check valve and drainage.
- Low voltage "Hold-to-run" type control box
- Mechanical block bars for safe servicing and maintenance operations
- Removable lifting eye(s) to make easier handling and installation
- Compliance with the Machinery Directive 2006/42CE and Safety Requirements for lift tables EN1570-1.


Designed for industrial heavy duty applications in material flow and manufacturing system as integral part of a production line (feeding of machineries, stacking, cutting, packaging operations).

CUSTOMIZED SOLUTIONS


Thanks to our experience and a wide range of accessories available, we are able to provide customized solutions to improve productivity, efficiency and safety to suit all specific requirements.




Safety handrails



Roll-off stop


PVC bellow


Top reinforcement for transit of truck

Model	Capacity	Stroke	Platform	Collapsed Height	Motor	Cylinder	
	kg	E mm	A x B mm	H mm	Kw	n.	diam.
A1.10.A010	1000	800	1400 x 800	300	1,1	1	90
A1.10.A020	1000	800	1400 x 1000	300	1,1	1	90
A1.10.A110	1000	800	1400 x 1400	300	1,5	2	70
A1.10.A030	1000	1100	1700 x 1000	300	1,1	1	90
A1.10.A040	1000	1100	1700 x 1200	300	1,1	1	90
A1.10.A130	1000	1100	1700 x 1400	300	1,5	2	70
A1.10.A050	1000	1300	2000 x 1000	320	1,1	1	90
A1.10.A060	1000	1300	2000 x 1200	320	1,1	1	90
A1.10.A150	1000	1300	2000 x 1400	320	1,5	2	70
A1.10.A370	1000	1600	2500 x 1200	350	1,5	1	90
A1.10.A380	1000	1600	2500 x 1500	350	3,0	2	90
A1.10.A390	1000	2000	3000 x 1200	350	3,0	2	90
A1.10.A400	1000	2000	3000 x 1500	350	3,0	2	90
A1.10.A410	1000	2000	3000 x 2000	350	3,0	2	90
A1.20.A010	2000	800	1400 x 800	300	1,5	1	110
A1.20.A020	2000	800	1400 x 1000	300	1,5	1	110
A1.20.A110	2000	800	1400 x 1400	300	1,5	2	90
A1.20.A030	2000	1100	1700 x 1000	300	1,5	1	110
A1.20.A040	2000	1100	1700 x 1200	300	1,5	1	110
A1.20.A130	2000	1100	1700 x 1400	300	3,0	2	90
A1.20.A050	2000	1300	2000 x 1000	320	1,5	1	110
A1.20.A060	2000	1300	2000 x 1200	320	1,5	1	110
A1.20.A150	2000	1300	2000 x 1400	320	3,0	2	90
A1.20.A370	2000	1600	2500 x 1200	350	3,0	2	90
A1.20.A380	2000	1600	2500 x 1500	350	3,0	2	90
A1.20.A390	2000	2000	3000 x 1200	350	3,0	2	90
A1.20.A400	2000	2000	3000 x 1500	350	3,0	2	90
A1.20.A410	2000	2000	3000 x 2000	350	3,0	2	90
A1.20.A420	2000	2000	3500 x 1500	350	3,0	2	90
A1.20.A430	2000	2000	3500 x 2000	350	3,0	2	90
A1.30.A010	3000	850	1500 x 1000	350	2,2	2	90

Model	Capacity	Stroke	Platform	Collapsed Height	Motor	Cylinder	
	kg	E mm	A x B mm	H mm	Kw	n.	diam.
A1.30.A020	3000	850	1500 x 1200	350	2,2	2	90
A1.30.A030	3000	1200	2000 x 1000	350	3,0	2	90
A1.30.A040	3000	1200	2000 x 1200	350	3,0	2	90
A1.30.A330	3000	1600	2500 x 1200	380	3,0	2	90
A1.30.A340	3000	1600	2500 x 1500	380	3,0	2	90
A1.30.A350	3000	2000	3000 x 1500	380	4,0	2	110
A1.30.A360	3000	2000	3000 x 2000	380	4,0	2	110
A1.30.A370	3000	2000	3500 x 1500	400	4,0	2	110
A1.30.A380	3000	2000	3500 x 2000	400	4,0	2	110
A1.50.A210	5000	1600	2500 x 1500	450	4,0	2	110
A1.50.A220	5000	1600	2500 x 2000	450	4,0	2	110
A1.50.A250	5000	1800	3000 x 1500	500	4,0	2	110
A1.50.A260	5000	1800	3000 x 2000	500	4,0	2	110
A1.50.A270	5000	1800	3500 x 2000	500	4,0	2	110
A1.50.A280	5000	1800	3500 x 2400	500	4,0	2	110
A1.50.A290	5000	2000	3500 x 2000	550	4,0	2	110
A1.50.A300	5000	2000	3500 x 2400	550	4,0	2	110
A1.50.A310	5000	2000	4000 x 2400	550	4,0	2	110
A1.70.A110	7000	1500	2500 x 1500	550	4,0	2	120
A1.70.A120	7000	1500	2500 x 2000	550	4,0	2	120
A1.70.A150	7000	1800	3000 x 1500	600	4,0	2	120
A1.70.A160	7000	1800	3000 x 2000	600	4,0	2	120
A1.70.A170	7000	1800	3500 x 2000	600	4,0	2	120
A1.70.A180	7000	2000	3500 x 2000	600	4,0	2	120
A1.70.A190	7000	2000	3500 x 2400	600	4,0	2	120
A1.70.A200	7000	2000	4000 x 2400	600	4,0	2	120

Bolzoni promotes environmental sustainable research and innovation.
For a lower impact on the environment, Bolzoni lift tables are available with biodegradable hydraulic oil on request, and are all provided with high-efficiency electric motors IE3. Lift tables are painted with water based nontoxic solvent free paint.
Bolzoni SpA lift tables facility is certified with the Environment Certificate ISO 14001:2015, since 2006.

79BA0137EN - 0121

bamar técnicas, s.l.

BOLZONI