Washing machine connectors / Conectores para lavadoras

WASHING MACHINE INLET HOSE PVC TUBING

TUBO DE PVC PARA LAVADORA

TAQ® LAVADORAS

Leer recomendaciones antes de su uso y/o instalación

Read recommendations before its use or installation



Applicable for washing machine with braiding of nylon and fittings of polyamide.

With strong resistance to corrosion, it's able to enduring high pressure and high temperature.

Aplicable a lavadoras con trenzado de nylon y racores de poliamida

Con alta resistencia a la corrosión, permite soportar altas presiones y también altas temperaturas.

Applications / Aplicaciones

Washing machines / lavadoras



Fittings / Racores






Dn	Nut / Tuerca	Elbow / Codo
10	3/4"	3/4"

Characteristics and technical specifications / Características y especificaciones técnicas

Dn	Flow rate Caudal	Minimum bending radius Radio de curvatura mínimo	Working pressure Presión de trabajo	Working temperature Temperatura de trabajo	H_2O potable:
11	40 l/min at 3 bar	40 mm	15 bar	22 °C	No

Materials / Materiales

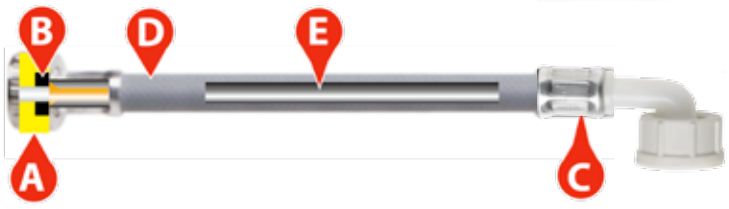

- A Polymade / Poliamida
- B EPDM incorporated / EPDM incorporado
- C Stainless Steel AISI304 / Acero inoxidable AISI304
- D PVC
- E PVC

Information subject to change without notice. / Información sujeta a cambios sin previo aviso.